




STOW MOBILE


The ideal combination of compact storage and accessibility of all pallets.

MOBILE PALLET RACKING

Stow Mobile is a high-density storage system designed to install pallet racking onto automated mobile carriages, allowing opening and closing of the aisles. Conventional static racking requires fixed aisles between racks, causing quite some redundant space. A mobile racking system is very efficient and only needs one aisle, creating a much higher warehouse industrial storage capacity. Where compact storage is required whilst keeping a high degree of accessibility to the stored products, mobile racking may be the best solution, especially where storage space is expensive, for example in cold stores.

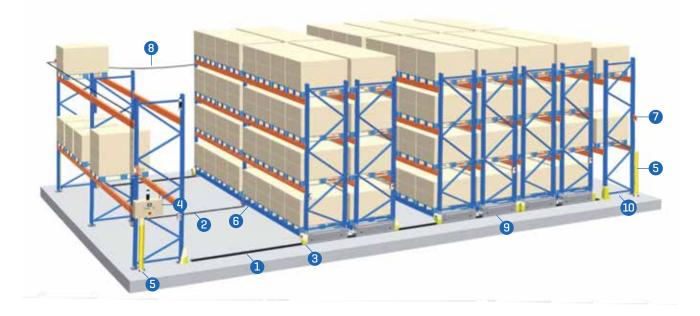

1/ Guiding rail



2/ Running rail



3/ Distance sensor &



4/ Main Control Cabinet

- 5/ Personal Detection System
- 6/ Motor/Drive
- 7/ Forklift counter
- 8/ Power supply cables
- 9/ Mobile rack
- 10/ Fix rack

INSTALLATION

- The mobile racking system moves on rail tracks installed in the concrete slab. The wheels of the mobile bases are running on at least two guiding rails and a number of flat rails.
- The rails are laid with high precision ensuring a long lasting operation. The mobile bases must run parallel so a very flat surface of the tracks is required.
- · No need for welding on site during the installation.
- The system is easily expandable with additional aisles, thanks to its decentralised set-up and easy light cabling. From a software point of view, the controller will recognise new aisles automatically (plug-and-play).

[CLEAR BENEFITS FOR EVERY APPLICATION]

- > Complies with the European FEM and EN regulations; quality assured to ISO 9001.
- Computer aided design ensuring the best solution for every application, including static calculation
- > All components have been thoroughly tested in specialized laboratories.
- > Fully automated production to a high quality standard and in a cost effective way



PHOTOELECTRIC SAFETY SYTEM

The safety of the operator is guaranteed by a photoelectric beam system, mounted on each side of each mobile rack and at the outer sides of the complete installation. It complies with the European Machine Safety Directives. When the equipment is put into motion, the safety light bar system is activated.

OPERATION

- The mobile racking is operated manually (each aisle is opened sequentially), semi-automatic (one instruction on the rack controller opens a specific aisle) or by remote control. Several aisles can be opened simultaneously for picking purposes.
- · Given commands are interrupted by selecting a new one (no need to finish the previous instruction).
- · Intelligent lighting, with energy saving interface: only the opened aisle is lighted.
- Stand by mode: the system goes into stand by mode after 15 min. of non use.
- · Night parking: all aisles open allowing air circulation in the whole system.
- · Adding P&D-locations may further increase the warehouse efficiency, resulting in a higher return on investment.





ELECTRONICS

- Central PLC combined with individual controllers per mobile base, resulting in less cabling (60%), faster communication and flexible configuration (when expansion is required).
- · Use of dedicated PLC, specifically developed for mobile racking applications, unlike generic controllers.
- · The controller is prepared to interface with a WMS.
- Dedicated remote control, configured for each application.
- Use of a Stow-Bus for communication, only active if sensor or command is activated, not continuously sending data.
- Inverter technology: guarantees smooth operation (start, slow down, stop) and less wear.
- High use of plug-connectors, guarantee a better service quality and faster assembly.


CONSTRUCTION

- Mobile base with 4 bearing wheels, for better distribution of the load.
- Special attention towards fatigue and lifetime of the various components.

SERVICE

- Remote maintenance access with remote error diagnostics: simplifies servicing and problem solving as the system can be analysed from distance.
- Own service staff



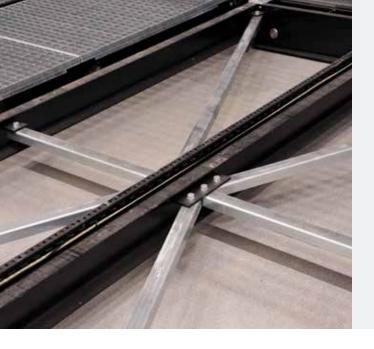

MOBILE BASE CONSTRUCTION

- Mobile base with 4 bearing wheels, for better distribution of the load.
- Use of crane rails: type A45 and S14
- Complete construction calculated by means of 3D- FEA modelling. Special attention towards fatigue and lifetime of the various components.









Cover plate

Motor

Connection

Corner protector with sensors



ADVANTAGES OF THE MOBILE SYSTEM

- Optimisation of available space:
 High density storage and floor utilisation; 80% compared to 40% in conventional pallet racking:
 - More storage capacity
 - Reduced costs per m² (heating, cooling, lighting)
- High degree of occupation [90 %], similar to conventional pallet racking, but higher than other compact storage systems, such as drive in [average of 70%].
- Different pallet sizes can be stored more easily, compared to other high density storage solutions, where high demands are imposed onto the pallet dimensions and quality
- The installation can be configured to optimise space in existing buildings, and can be easily expanded with new blocks.

The mobile system is the best logistical solution where a combination of compact storage and individual pallet accessibility is required.



MOBILE SAFETY SYTEM

- Into motion, the safety system is activated.
- Safe for multiple fork lift truck entries: the number of fork lift trucks in one open aisle is counted; the aisle only closes if all trucks have left the aisle.
- · Approved personal detection system.
- Safety stop on the racking.
- · Safety warning (sound and light).



Remote control from an RF-terminal installed in the lifttruck or from a handheld device.





Lighting control system



Other racking systems installed on mobile bases, e.g. Cantilever mobile



OTHER STOW PRODUCTS

Pal Rack



Stow Atlas







Stow Shelf

Midi Rack

Mezza Stow







